


HSF



RoHS

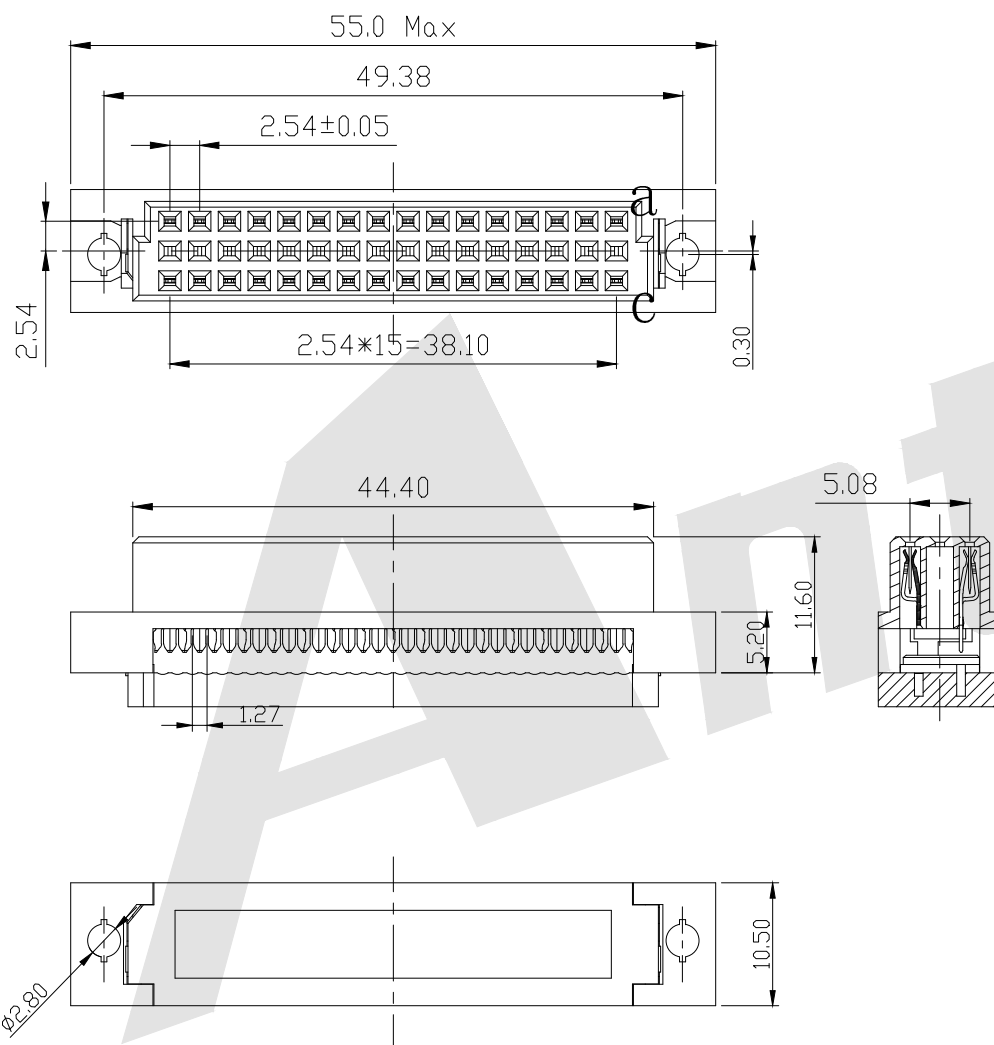

SPECIFICATION

Current Rating: 3.0Amp

Insulation Resistance: 1000M Ω min.Contact Resistance: 30M Ω max

Withstand Voltage: AC 1000V For 1 Minute

Operating Temperature: -55° C to +105° C

Contact Material: Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: PBT+30%GF UL 94V-0

Ordering Code:

DID - 32 - K - 1 - S0 - 3R

① ② ③ ④ ⑤ ⑥

① Series No:

② No. of Contacts
16P 32P③ Rows Loaded With Contacts
A: Row a
K: Row a+c
D: Row c④ Plastic Length
1: 2x16P
2: 1x16P⑤ Contact Plating
G0: Gold flash
S0: Gold flash/Ni
G1: 3u" Gold
S1: 3u" Gold/Ni
G2: 5u" Gold
S2: 5u" Gold/Ni
G3: 10u" Gold
S3: 10u" Gold/Ni
G4: 15u" Gold
S4: 15u" Gold/Ni
G5: 30u" Gold
S5: 30u" Gold/Ni
SN: Tin⑥ Series Number
3R

Unless Otherwise specified tolerance

X. ± 0.35 X. XX: ± 0.20
X. X: ± 0.25 X. XXX: ± 0.15

SCALE: As Shown UNIT: mm

DRAW JACKY DATE 15/01/2021

CHECK BobYang DATE 15/01/2021



3rd ANGLE PROJECTION



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE: DIN41612 Vertical Female Type
32P IDC Connectors 3Row

DRAWING NO: DID-32K1S0-3R

PRODUCT NO: DID-32K1S0-3R



Update Drawing
DESCRIPTION

05/05/2021

DATE

REV

1

2

3

4

5

6

7

8