




HSF









ROHS



COVER

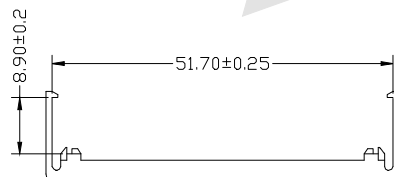

STRAIN RELIEF

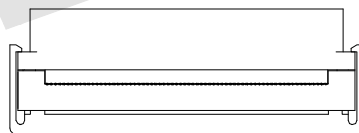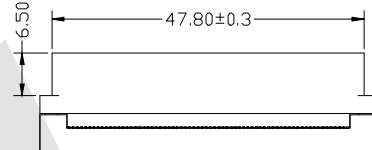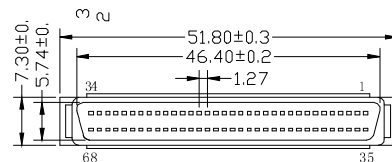

SPECIFICATIONS:

1. Electrical Characteristics:

- 1.1 Contact Current Rate: 1AMP
- 1.2 Insulation Resistance: 500MΩ Minimum
- 1.3 Contact Resistance: 35MΩ Maximum
- 1.4 Dielectric Voltage: 500V AC For One Minute
- 1.5 Operation Temperature: -55° C To +105° C

2. Material:

- 2.1 Insulator: PBT UL94V-0 Black
- 2.2 Contact: Phosphor Bronze, Gold Selective Plated


Ordering Code:

HPDBI - M6 - 68 - P - R - X
① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② Contact Type:
M6: Male 0.635mm Pitch
For 30AWG Flat Ribbon Cable
- ③ Contact NO.:
68=68P
- ④ Hood Finishes:
P=All Plastic
- ⑤ Strain Relief:
R=With Strain Relief
- ⑥ Contact Plating:
S0: Gold Flash Selective Plating
S2: 5u" Gold Selective Plating
S4: 15u" Gold Selective Plating
S5: 30u" Gold Selective Plating

Unless Otherwise specified tolerance
X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15

SCALE: As Shown UNIT: mm
DRAW Jack Bao DATE 9/18/2018
CHECK Bob Yang DATE 9/18/2018



ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
1.27mm Series Pin Type 68P Plug Connector For
0.635mm Flat Ribbon Cable

DRAWING NO: HPDBI-M668PRX

PRODUCT NO: HPDBI-M668PRX

REV

DESCRIPTION

DATE

1

2

3

4

5

6

7

8